



THE  
**CHOICE**  
COLLECTION

**ONE WINDOW,  
ENDLESS POSSIBILITIES**

**COLORS**

**SOLID VINYL  
COLORS**



White



Tan

**LAMINATED  
INTERIORS**



Cavalier  
Oak



Colonial  
Cherry

**LAMINATED  
EXTERIORS**



Black



Bronze

**GRIDS**



Colonial



Perimeter



Prairie



Valance


**SCREENS**



Standard  
1/2 Screen



Heavy Duty  
1/2 Screen



Full Screen

AVAILABLE UPGRADE



**FLEXSCREEN.**



**SCAN FOR MORE  
INFORMATION**



# THE CHOICE COLLECTION

## PRODUCT RATING:

### R-PG50

(Double Strength Glass)

R-PG45 (Single Strength Glass)

## AIR INFILTRATION: .12

150% better than FGIA standard

## SIZE LIMITS


4700 Double Hung	Width	Height	UI*
Minimum	14"	24"	38"
Maximum	52"	98"	132"

### MAXIMUM TRIPLE PANE SIZE

50" width x 80" height

\*United Inches = Width + Height

## AVAILABLE STYLES

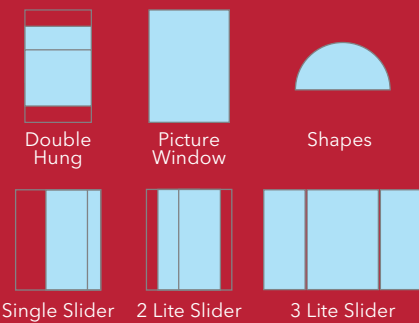

## PRODUCT FEATURES

- 3-1/4" Frame with beveled exterior
- Maintenance-free multi-chambered fusion welded vinyl
- IdeaSeal™ triple protection - integral interlock, sill compression seal and weatherstripping
- Dual function partitioned sloped sill
- Cove moulded interior sash profiles
- Triple weatherstripping on sashes
- Integral lift rails
- BioMaxx lead-free composite locks and keepers
- Flush mount tilt latches
- ASTM forced entry rated night locks
- Concealed sash stop system
- Stainless steel constant force balances
- Metal cam balance shoe
- Full balance covers
- Aluminum screen frame
- BetterVue® screen mesh
- Dual (3/4") or triple (1-1/8") pane glass
- Tape glazed
- Intercept® Spacer System
- Limited Lifetime Warranty

## OPTIONAL FEATURES

- Intelliglass high performance IGU
- 1-5/8" integral nail fin with 1" setback
- Jamb Extensions (4-9/16" or 6-9/16")
- Heavy duty, full or FlexScreen®
- Black or bronze exterior laminates on white
- Woodgrain interior laminates
- Tempered and STC rated glass
- Super Spacer® flexible warm-edge spacer system
- Foam filled frame
- Sentry System dual-action tilt/lock hardware
- Interior & exterior SDL packages

**IntelliGlass**  
high performance

Glass Panes: 2  
Low-E Surfaces: 1

**IntelliGlass X**  
solar control

Glass Panes: 2  
Low-E Surfaces: 1

**IntelliGlass X<sup>3</sup>**  
solar control triple pane


Glass Panes: 3  
Low-E Surfaces: 1

**IntelliGlass +**  
high performance triple pane

Glass Panes: 3  
Low-E Surfaces: 2



ENERGY STAR® for Windows, Doors, and Skylights  
CLIMATE ZONE MAP

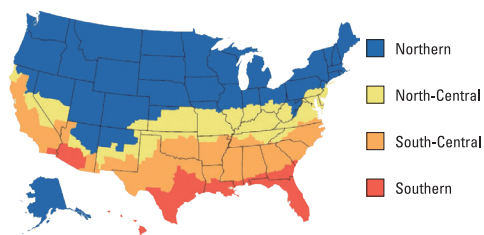

4700 Double Hung	U Value	SHGC	VLT	Energy Star	SCAN FOR MORE PERFORMANCE DATA
IntelliGlass Low E / Argon	.28	.38	.53	N NC	
IntelliGlass X Low E / Argon	.28	.22	.50	NC SC S	
IntelliGlass X3 Triple Pane Low E / Argon	.24	.21	.46	N NC SC S	
IntelliGlass Plus Triple Pane Low E / Argon	.20	.24	.40	N NC SC S	

**U-Value** measures the rate of heat transfer and tells you how well the window insulates. The lower the U-Value, the better the window insulates.

**Solar Heat Gain Coefficient** measures the fraction of solar energy transmitted and tells you how well the product blocks heat caused by sunlight. SHGC is measured on a scale of 0 to 1. The lower the SHGC, the less solar heat the window transmits.

**Visible Light Transmittance** measures the fraction of visible light transmitted through the window. The higher the Visible Light Transmittance, the more light shines through.

Manufactured exclusively for



Above values are for SS glass, Argon, Intercept Spacer, no grids, no reinforcement.  
Scan QR Code for more available values.