

ONE WINDOW, ENDLESS POSSIBILITIES


COLORS

SOLID VINYL COLORS



White

GRIDS





Cavalier Oak

Colonial Cherry



Black

ويشاور والمرجوع والمرجوع والمرجوع والمرود





FLEXSCREEN.





SCAN FOR MORE INFORMATION











FRANKLIN 01-24 Information accurate at time of printing. Product subject to change. ©2024 Vinylmax LLC





PRODUCT RATING: R-PG50

(Double Strength Glass)

R-PG45 (Single Strength Glass)

AIR INFILTRATION: .12 150% better than FGIA standard

SIZE LIMITS


| 4700 Double Hung | Width | Height | UI* | | |
|------------------|-------|--------|------|--|--|
| Minimum | 14" | 24" | 38″ | | |
| Maximum | 52″ | 98″ | 132" | | |

MAXIMUM TRIPLE PANE SIZE

50" width x 80" height

*United Inches = Width + Height

AVAILABLE STYLES




PRODUCT FEATURES

- 3-1/4" Frame with beveled exterior
- Maintenance-free multi-chambered fusion welded vinyl
- IdeaSeal[™] triple protection integral interlock, sill compression seal and weatherstripping
- Dual function partitioned sloped sill
- Cove molded interior sash profiles
- Triple weatherstripping on sashes
- Integral lift rails
- BioMaxx lead-free composite locks and keepers
- Flush mount tilt latches
- Night latches restrict sash movement for safety and security
- Concealed sash stop system
- Stainless steel constant force balances
- Metal cam balance shoe
- Full balance covers
- Dual (3/4") or triple (1-1/8") pane glass
- Tape glazed
- Intercept® Spacer System
- Limited Lifetime Warranty

OPTIONAL FEATURES

- Intelliglass high performance IGU
- 1-5/8" integral nail fin with 1" setback
- Jamb Extensions (4-9/16" or 6-9/16")
- Heavy duty or full FlexScreen®
- Black or bronze exterior laminates on white
- Woodgrain interior laminates
- Tempered and STC rated glass
- Super Spacer® flexible warm-edge spacer system
- Foam filled frame
- Sentry System dual-action tilt/lock hardware
- Interior & exterior SDL packages

GLASS PACKAGES

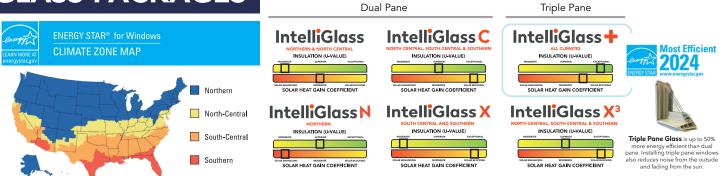

| PERFORMANCE DATA | No Grids Intercept Super Spacer | | | With Grids Intercept Super Spacer | | | | | | | | |
|---|------------------------------------|------|------------|--------------------------------------|-----|-----------------|------------|------|------------|------|-----|-----------------|
| 4700 Double Hung | U Value | SHGC | U Value | SHGC | VLT | ENERGY STAR 7.0 | U Value | SHGC | U Value | SHGC | VLT | ENERGY STAR 7.0 |
| IntelliGlass Low E / Argon | .29 | .29 | .28 | .29 | .54 | | .29 | .26 | .28 | .26 | .48 | |
| IntelliGlass X Low E / Argon | .28 | .21 | .27 | .21 | .49 | SC S | .28 | .19 | .27 | .19 | .44 | SC S |
| IntelliGlass N Low E / Argon | .25 | .46 | .24 | .46 | .54 | Ν | .25 | .42 | .24 | .42 | .49 | Ν |
| IntelliGlass C Low E / Argon | .24 | .20 | .23 | .20 | .45 | NC SC S | .24 | .18 | .23 | .18 | .40 | NC SC S |
| IntelliGlass X3 Triple Pane Low E / Argon | .25 | .20 | .23 | .20 | .45 | NC SC S | .25 | .18 | .24 | .18 | .40 | NC SC S |
| IntelliGlass Plus Triple Pane Low E / Argon | .20 | .24 | .18 | .24 | .42 | N NC | .20 | .22 | .19 | .22 | .37 | N NC SC S |

FRANKLIN 01-24 Information accurate at time of printing. Product subject to change. ©2024 Vinylmax LLC