




ONE WINDOW, ENDLESS POSSIBILITIES

COLORS



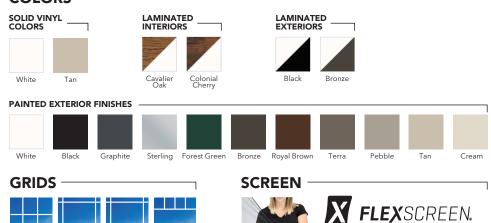

SCAN FOR MORE INFORMATION





SHARK TANK













PRODUCT RATING: R-PG50

(Double Strength Glass)

R-PG45 (Single Strength Glass)

AIR INFILTRATION: .12 150% better than FGIA standard

SIZE LIMITS


4700 Double Hung	Width	Height	UI*
Minimum	14"	24"	38"
Maximum	52"	98"	132"

MAXIMUM TRIPLE PANE SIZE

50" width x 80" height

*United Inches = Width + Height

AVAILABLE STYLES



3 Lite Slider

Product Features

- 3-1/4" Frame with Beveled Exterior
- Multi-Chambered Fusion Welded Vinyl
- IdeaSeal[™] Triple Protection Integral Interlock, Sill Compression Seal and Weatherstripping
- Dual Function Partitioned Sloped Sill
- Cove Molded Interior Sash Profiles
- Triple Weatherstripping on Sashes
- Integral Lift Rails
- BioMaxx Lead-Free Composite Locks and Keepers
- Ergonomic Tilt Latches
- Night Latches Restrict Sash Movement for Safety and Security
- Concealed Sash Stop System
- Stainless Steel Constant Force Balances
- Metal Cam Balance Shoe
- Full Balance Covers
- Dual (3/4") or Triple (1-1/8") Pane Glass
- Tape Glazed
- Intercept® Spacer System
- Limited Lifetime Warranty

Optional Features

- IntelliGlass High Performance IGU
- 1-1/2" Integral Nail Fin with 1" Setback
- Jamb Extensions (4-9/16" or 6-9/16")
- Aluminum 1/2 Screen (White Only)
- Black or Bronze Exterior Laminates on White
- Woodgrain Interior Laminates
- 11 Painted Exterior Color Options
- Tempered and STC Rated Glass
- rTPS Spacer System
- Foam Filled Frame
- Sentry System Dual-Action Tilt/Lock Hardware
- Interior and Exterior SDL Packages

GLASS PACKAGES

Dual Pane

2 Lite Slider



Triple Pane Glass is up to 50% more energy efficient than dual pane. Installing triple pane windows also reduces noise from the outside and fading from the sun.

Triple Pane







PERFORMANCE DATA







With Grids

.47

.51 .49

.40

-energy	ERGY STAR® for Windows MATE ZONE MAP	
		Northern North-Central South-Central Southern

I EKI OKIMANGE DANA		rT	PS	Intercept				r	ΓPS	Intercept		
4700 Double Hung		U Value	ENERGY STAR 7.0	U Value	ENERGY STAR 7.0	SHGC	VLT	U Value	ENERGY STAR 7.0	U Value	ENERGY STAR 7.0	SHGC
IntelliGlass Low E / Argon	SS	.28		.29		.29	.54	.28		.29		.26
	DS	.28		.29		.28	.53	.28		.29		.26
IntelliGlass X Low E / Argon	SS	.28	SC S	.28	SC S	.21	.50	.28	SC S	.28	SC S	.19
	DS	.27	SC S	.28	SC S	.21	.49	.27	SC S	.28	SC S	.19
IntelliGlass N Low E / Argon	SS	.25	N	.25	N	.48	.57	.25	N	.25	N	.43
	DS	.24	N	.25	N	.46	.54	.24	N	.25	N	.42
IntelliGlass C Low E / Argon	SS	.24	NC SC S	.24	NC SC S	.20	.46	.24	NC SC S	.24	NC SC S	.18
	DS	.23	NC SC S	.24	NC SC S	.20	.45	.23	NC SC S	.24	NC SC S	.18
IntelliGlass X3 Triple Pane Low E / Argon	SS	.23	NC SC S	.24	NC SC S	.20	.46	.23	NC SC S	.25	NC SC S	.18
	DS	.24	NC SC S	.25	NC SC S	.20	.45	.24	NC SC S	.25	NC SC S	.18
IntelliGlass Plus Triple Pane Low E / Argon	SS	.19	N NC	.20	N NC	.24	.42	.19	N NC SC S	.20	N NC SC S	.22
	DS	.20	N NC	.21	N NC	.24	.41	.20	N NC SC S	.21	N NC SC S	.22

No Grids